


Fiber Patch Cords & Pigtail

Fiber patch cable and pigtail are ultra reliable devices featuring low insertion loss and back reflection. The fiber patch cable and pigtail come with your choice of simplex or duplex cable configurations and various types of pigtail and connector terminations to meet your requirement.

Feature: Meets JIS C5973 F04 type and EIA/TIA 604-3A standards / Economical in both design and termination process / Reduce assembly time and simplify training / Reduce maintenance and creates consistent optical performance / Stable performance

Application: CATV; Active device termination; Telecommunication networks; Metro; Local Area Networks; Data processing networks; Test equipment; Premise installation; Wide Area Networks;

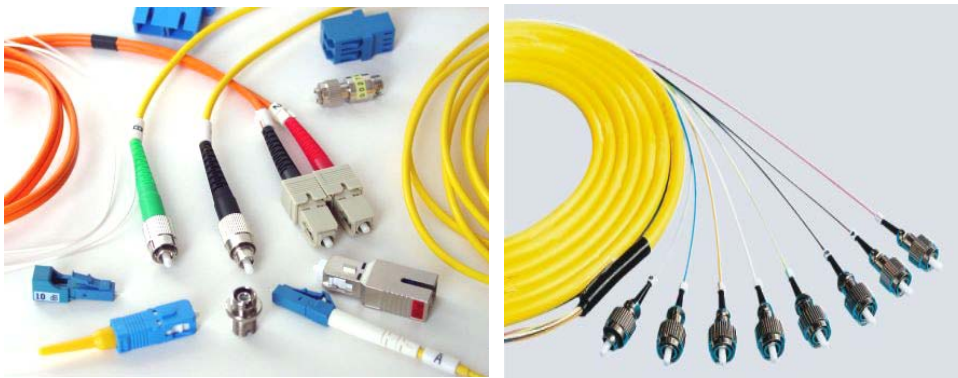

LC Patch Cord



SC Patch Cord



FC Patch Cord



ST Patch Cord



MU Patch Cord

100% Optic test(Insertion Loss & Return Loss)

Type:	Singlemode / Multimode, Patch cord / Pigtail
Connectors:	SC, ST, FC, LC, MTRJ, E2000, MU, DIN, D4...etc.
Cable Size:	0.9/1.6/2.0/3.0 mm, PVC / LSZH optional.
Fiber Type:	9/125μm (SM) 50/125μm (MM) 62.5/125μm (MM)
Insertion loss:	≤0.20dB(SM) ≤0.30dB(MM)
Return loss:	≥50dB (SM) ≥30dB(MM)
Durability:	≤0.2 dB typical change, 500 matings
Cable number:	Simplex / Duplex / Fan-out(4-12f)
Application:	PC/ APC
Tensile Strength:	>10kg
Boot Color:	Beige / Black / Blue / Green / Gray / White / Red
Connector Color:	Beige / Blue / Green / Black / Grey
Operating Temperature:	-40 to + 80°C

