ATTENUATOR

Fixed / Plug-in Attenuator

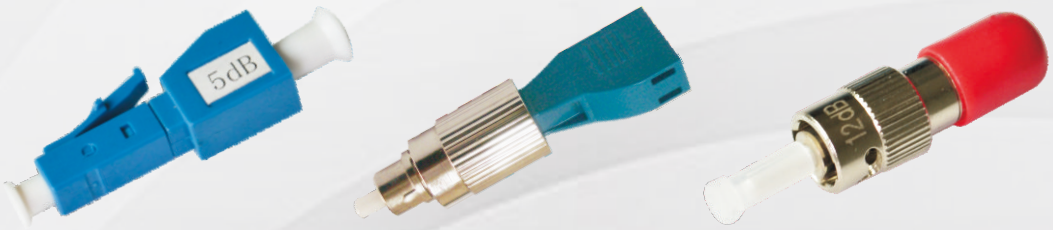

Applications

- Telecommunication networks
- Fiber optic sensors
- Test and measurement
- CATV
- LAN and WAN
- FTTX

Features

- Plug-in type package
- Accurate attenuation
- Ultra-low back reflection
- Broad wavelength band
- Flat response over all wavelengths
- Environmentally stable

Performance

Type	Single mode	Multi-mode
Operating Wavelength(nm)	1200-1600	850/1300
Return Loss(dB)	>55	>55
Attenuation Accuracy(dB)	+/-0.5	+/-0.5
Polarization Dependent Loss(dB)	<0.2	<0.2
Maximum Optical Input Power(mW)	200	200
Operating Temperature(°C)	-20 to +70	-20 to +70