
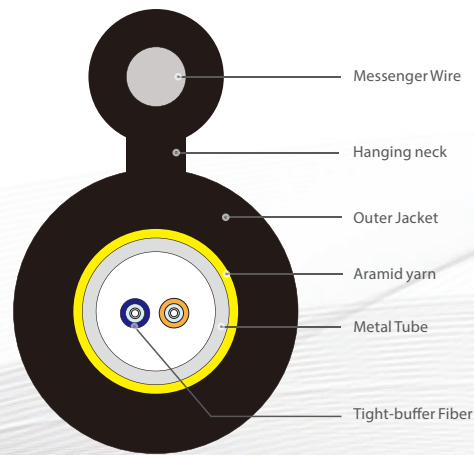


## OUTDOOR CABLE

# GYXTC8S II

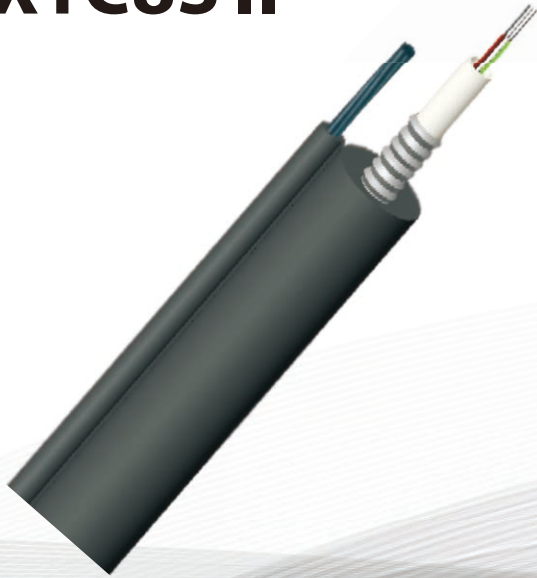

## Description

GYXTC8S optical cable is a 900μm tightly wrapped outer sheath with a layer of armor tube longitudinally, and aramid material is added between the armor tube and the outer sheath to ensure the compactness and longitudinal water resistance of the optical cable, and the steel wire strand is integrated into a figure 8 The polyethylene sheath.

## Applications

- Long-distance communication, inter-office communication and fiber optic cable entry.
- The optical cable complies with YD/T1155-2011 and IEC60794-1 standards.

## Features

- The steel wire strand has extremely high tensile strength, which is convenient for self-supporting overhead laying and reduces installation costs.
- Have good mechanical properties and temperature characteristics, good pressure resistance.
- The loose tube material itself has good water resistance and high strength.
- The tube is filled with special gel to protect the optical fiber critically.
- Double-sided plastic coated steel tape (PSP) moisture-proof layer line.
- Small diameter, light weight, easy to lay.
- Long delivery length.

## Cable Parameters

Fiber Count	Cable Dimeter mm	Steel Specs	Messenger wire Diameter (mm)	Tensile Long/ Short Term (N)	Crush Long/ Short Term (N)	Bending Radius Static/Dynamic mm	Temperature
1*0.9mm	3.5*6.5	1	1.2mm	1000/2000	1000/3000	10D/20D	-40~+70
2*0.9mm	3.7*6.7	1	1.2mm	1000/2000	1000/3000	10D/20D	-40~+70

## Optical Characteristic

Fiber Type		Attenuation (dB/km)		Full Bandwidth (MHZ.km)	Effective Bandwidth (MHZ.km)	1Gbps Reach (m)	10Gbps Reach (m)	Min Bend Radius (mm)
Multi Mode		850/1300nm		850/1300nm	850nm	850/1300nm	850/1300nm	/
		Typical	Max					
62.5/125	OM1	3.0/1.0	3.5/1.5	200/500	220	275/550	33/300	30
50/125	OM2	3.0/1.0	3.5/1.5	500/500	510	550/550	82/300	30
50/125-150	OM2+	3.0/1.0	3.5/1.5	700/500	850	750/550	150/300	30
50/125-300	OM3	3.0/1.0	3.5/1.5	1500/500	2000	1000/550	300/300	30
50/125-550	OM4	3.0/0.7	3.0/1.0	3500/500	4700	1000/550	550/550	30
Single Mode		1310/1550nm		/	/	1310/1550nm	1310/1550nm	/
		Typical	Max					
9/125μm	G652D	0.36/0.22	0.5/0.4	—	—	5000m	10000-40000m	30
9/125μm	G657A1	0.36/0.22	0.5/0.4	—	—	5000m	10000-40000m	10
9/125μm	G657A2	0.36/0.22	0.5/0.4	—	—	5000m	10000-40000m	7.5